




## Town of Wickenburg

### CONSTRUCTION HYDRANT METER DETAIL

#### GENERAL NOTES

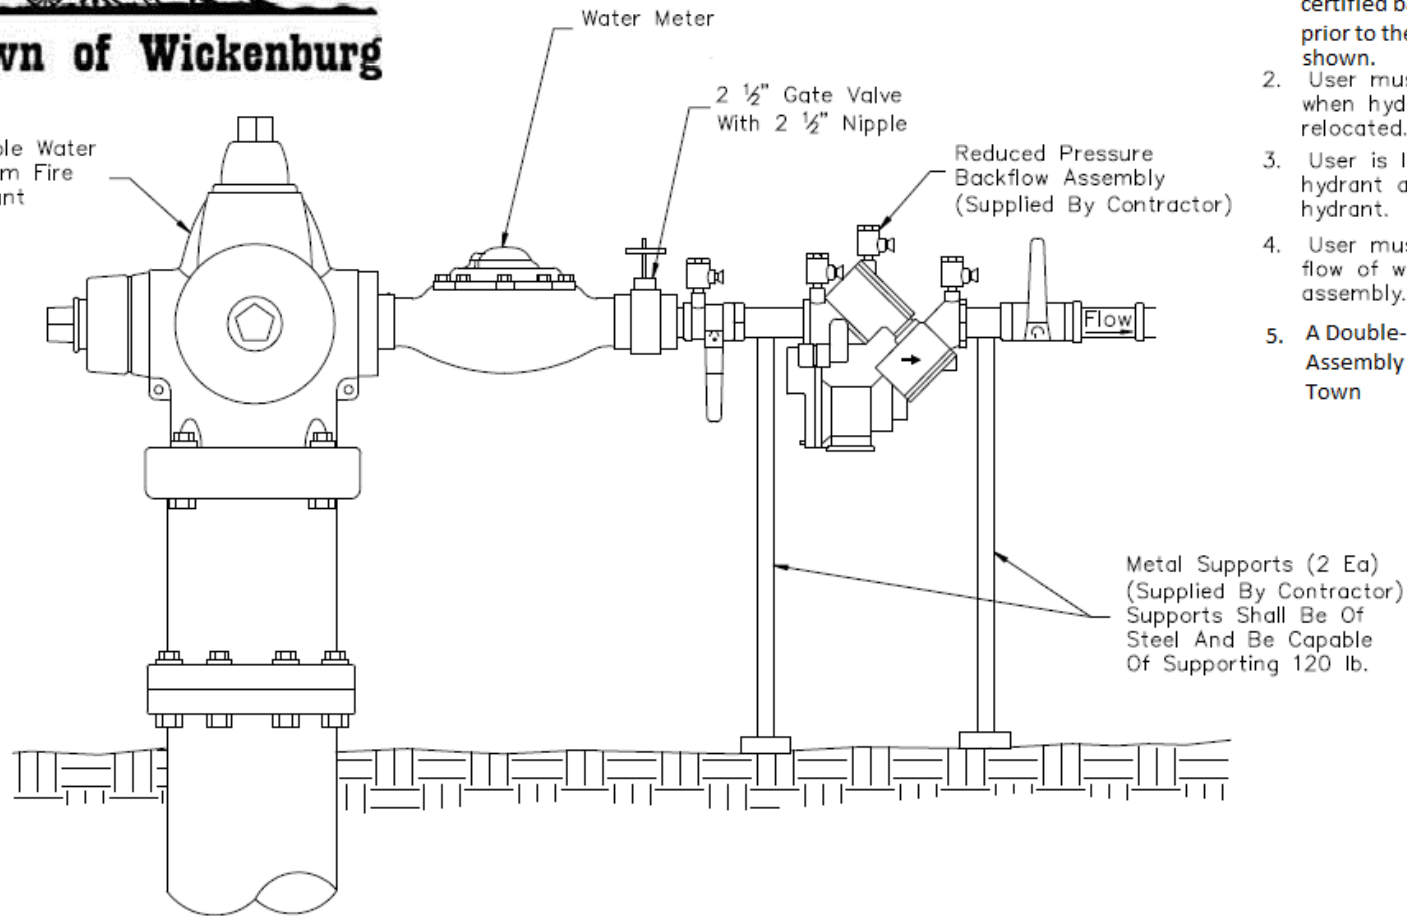

1. Backflow assembly must be tested by a certified backflow assembly tester 30 days prior to the meter being set. Proof must be shown.
2. User must remove backflow assembly when hydrant meter is removed or relocated.
3. User is liable for any damage to the hydrant and all attachments to the hydrant.
4. User must use gate valve to control flow of water, not the hydrant valve assembly.
5. A Double-Check Valve Backflow Assembly may be used if approved by the Town